


VINITEX SL

VINITEX SL is a non-reinforced flexible PVC-P membrane with a signal layer.

ADVANTAGES

- Weatherproof resistance.
- Highly puncturing resistance.
- Excellent mechanical properties.
- Easily Hot-air weldable, even several years after installation.
- Excellent flexibility at low temperatures.
- Root resistant according to EN 13948:2008.
- Highly resistant to attack by micro-organisms.

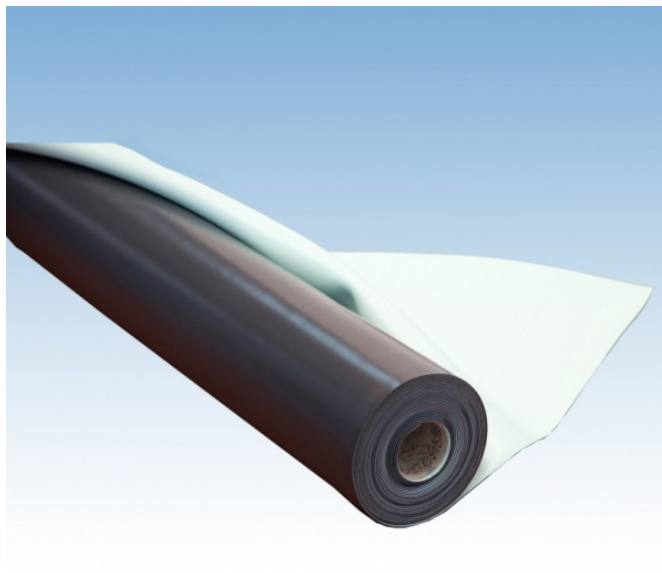

APPLICATION

VINITEX SL is a two coloured membrane used as a waterproofing layer in civil engineering and building structures, such as; Tunnels and buried galleries, cut and cover tunnels, underground works, covering of buried structures and underground car parks.

REGULATIONS

- Produced under European Standard EN 19367 and EN 13491. Certificate CE nº 1085/CPR/0264.
- Manufactured by coextrusion or cast process in a plant certified ISO 9001.

Synthetic Waterproofing PVC

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

PACKAGING AND STORAGE

Colour (Surface/underside) Yellow / Dark grey

	Vinitex SL 1.5	Vinitex SL 2.0	Vinitex SL 3.0
Length (m)(1)	20	20	20
Width (m)	2.10	2.10	2.10
m2/roll	42	42	42
m2/pallet	966	756	462
Rolls/pallet	23	18	11

Storage: Horizontal and parallel (never crossed). Supplied in roll son cardboard tubing. Store in the original packaging in a dry and cool place.

Synthetic Waterproofing PVC

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

TECHNICAL PROPERTIES

PROPERTIES	Unit	Test method	Vinitex SL 1.5	Vinitex SL 2.0	Vinitex SL 3.0
Thickness	mm	EN 1849-2	1.5 (±5%)	2.0 (±5%)	3.0 (±5%)
Mass per unit area	Kg/m ²	EN 1849-2	1.95	2.6	3.9
Reaction to fire		EN 13501-1	E	E	E
Water	-	EN 1928 (B)	Pass	Pass	Pass
Tightness		EN 14150	< 10-6m ³ m-2d-1	< 10-6m ³ m-2d-1	< 10-6m ³ m-2d-1
Tear resistance	N	EN 12310-1	> 120	>150	> 225
Tear resistance	N/mm	ISO 34	≥ 45	≥ 45	≥ 45
Joint shear resistance	N/50 mm	EN 12317-2	> 750	> 1000	> 1500
Impact resistance	mm	EN 12691	≥ 450	≥ 750	≥ 1000
Tensile strength to Break (LxT)	N/mm ²	ISO 527-3	≥ 15x14	≥ 15x14	≥ 15x14
Elongation to Break (LxT)	%	ISO 527-3	≥ 300x280	≥ 300x280	≥ 300x280
Static puncture resistance	KN	ISO 12236	≥ 2.2	≥ 2.2	≥ 3.4
Static puncture resistance	Kg	EN 12730	≥ 20	≥ 20	≥ 20
Durability:					
After thermal ageing	-	EN 1296	Pass	Pass	Pass
After immersion in chemicals	-	EN 1847	Pass	Pass	Pass
Resistance to oxidation	%	EN 14575	≤ 25	≤ 25	≤ 25
Foldability at low temperatures	°C	EN 495-5	≤ - 25	≤ - 25	≤ - 25
Root resistance	-	CEN/TS 14416	Pass	Pass	Pass
Dimension stability	%	EN 1107-2	≤ 2	≤ 2	≤ 2

Synthetic Waterproofing PVC

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.